


MINIFILED
TWIN 10°
Spots LED in duo



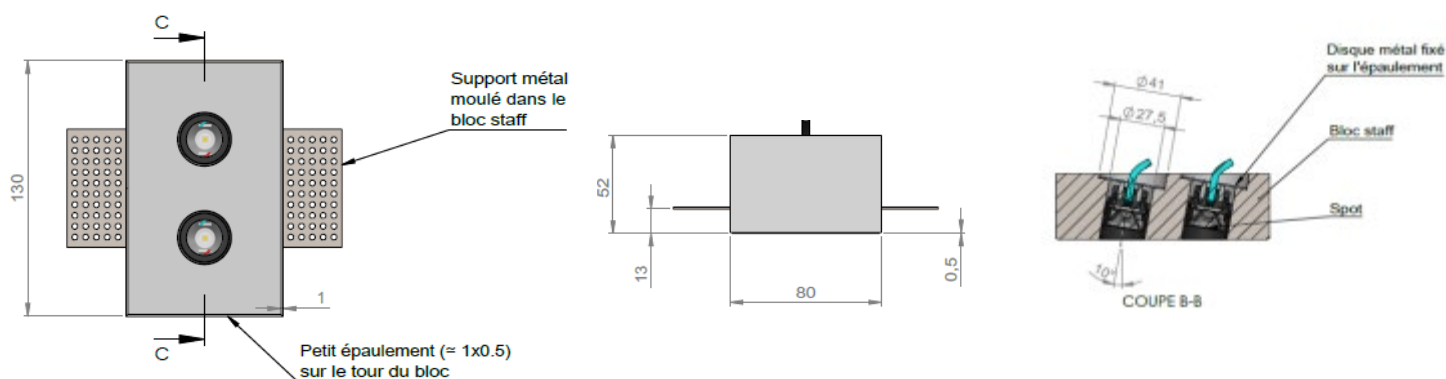

MINIFILED TWIN 10°

Range	Duo of small luminaires for ambient lighting
Description	Set of two recessed spotlights with magnetic system in a staff block with brackets for fixing on BA13 Spotlights inclined at 10° and fitted with a low-luminance barrel Luminous flux: 110 lm per spot Rough staff to be painted
Installation	Flush-mounted in BA13 plasterboard
LED characteristics	2 LEDS 2700K - 3000K - 3500K - 4000K MacAdam ellipse: 3 SDCM CRI: 90
Optical beam	24°
Serial connection	60cm of cable
Separate power supply	700mA constant current driver – Remote driver < 15m
Consumption	2.4 W
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOuss

Last update: 31/07/2024

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE