


MINIFILED TWIN WW

Spots LED in duo



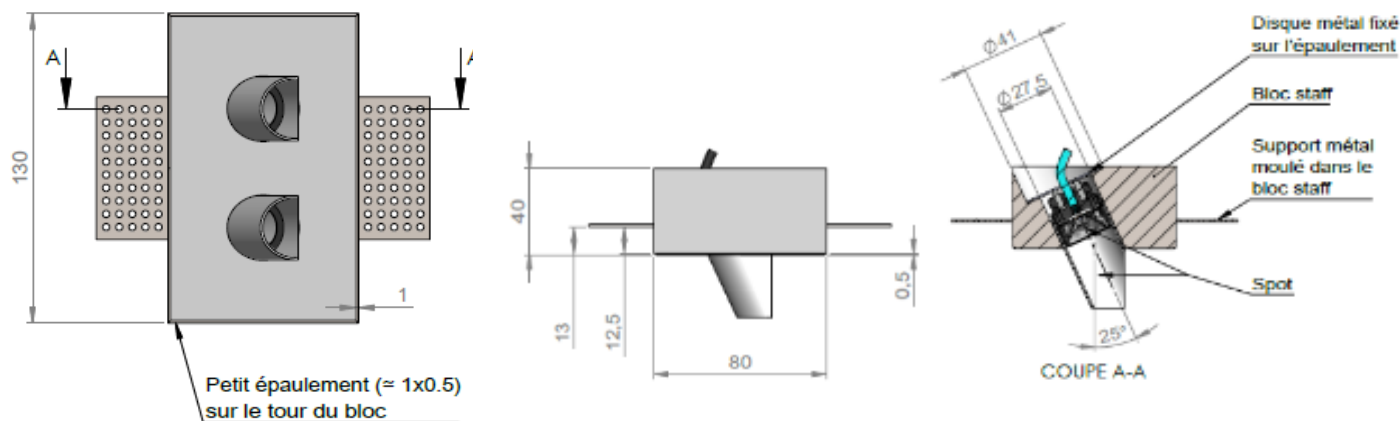

MINIFILED TWIN WW

Range	Duo of small luminaires for ambient lighting
Description	<p>Set of two recessed spotlights in a staff block with brackets for fixing on BA13</p> <p>Spotlights fitted with a low-luminance gun</p> <p>Luminous flux: 110 lm</p> <p>Unfinished staff finish</p> <p>Tubes painted in white RAL to be specified</p>
Installation	Flush-mounted in BA13 plasterboard
LED characteristics	<p>2 LED 2700K - 3000K - 3500K - 4000K</p> <p>Ellipse de MacAdam: 3 SDCM</p> <p>IRC: 90</p>
Optical beam	40° with Wall Washer system
Connection	60cm of cable
Separate power supply	700mA constant current driver - Remote driver < 15m
Consumption	2W
Use limitations	<p>The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (T_a) would lead to a more rapid mortality of the product and the withdrawal of our guarantees.</p> <p>The drivers, if not delivered by LOuss, must be approved before use.</p>
Warranty	<p>Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty.</p> <p>The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product.</p> <p>All products are electrically tested and received a functional burn-in.</p>

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOuss

Last update : 31/07/2024

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE