

## AURORE D52

Recessed version  
with mounting ring





## AURORE D52

### Recessed version with mounting ring

<b>Range</b>	Highly flexible recessed ceiling downlight for general & accent cardanic lighting
<b>Description</b>	Low luminance LED ENGINE 600 to 2,000 lm (1,200lm for the 13Wmax. version) Rotation 360° - Adjustable tilt 30° + 30° White finish RAL 9003 (other upon request)
<b>Net weight</b>	0.450 kg
<b>Installation</b>	Installation diameter: 95mm No specific tools required
<b>LED characteristics</b>	2700K - 3000K - 3500K - 4000K - 5000K MacAdam ellipse: 3 SDCM (version standard) - 2 SDCM (premium version) CRI 90 (standard version) - CRI 95, R9 > 90 (premium version) UGR < 15
<b>Optical beam</b>	7° - 12° - 15° - 20° - 25° - 30° - 35° - Elliptic Special filter, honey comb upon request
<b>Separate power supply</b>	350mA to 1.400mA constant current driver according to selected version Dimmable driver upon request
<b>LED power</b>	6W to 20W driver included
<b>Connection</b>	Supplied with 0.50m cable
<b>Use limitations</b>	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
<b>Warranty</b>	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.

LOuss

Last update : 23/10/2019

Firalux & LOuss brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group



Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE





## AURORE D52

*Recessed version with mounting ring*

Length 95mm ≤ 13W

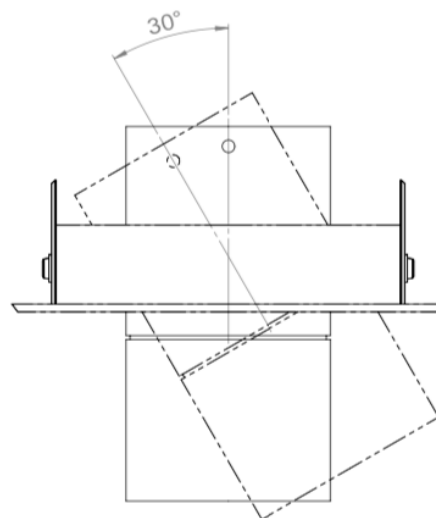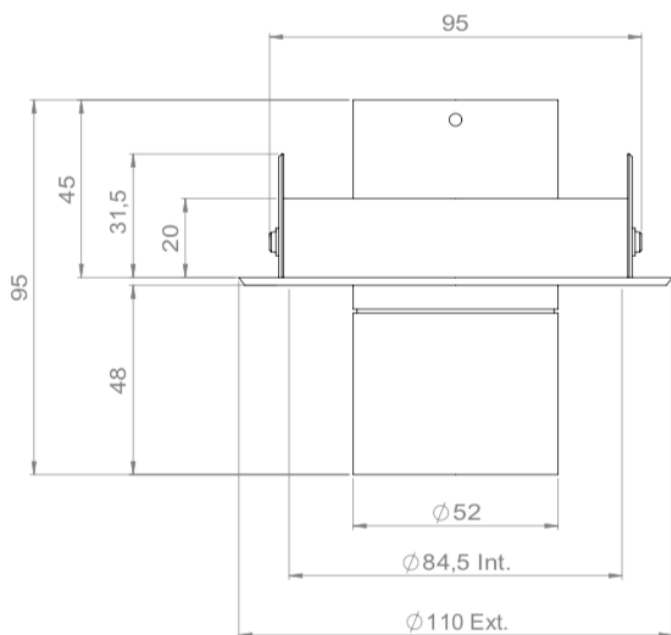

Length 140mm ≤ 20W

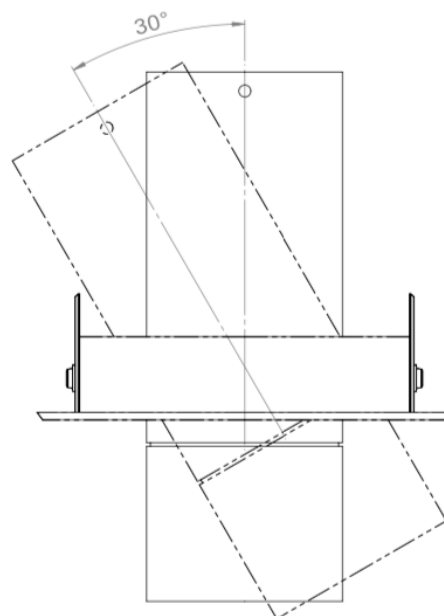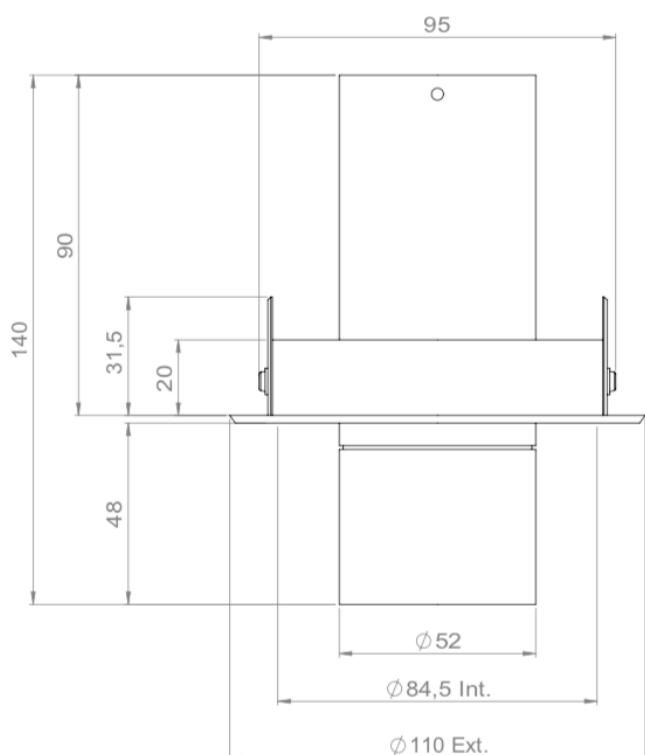

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.

**LOUSS**

Last update : 23/12/2020

*Firalux & LOUSS brands*

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Phillibert  
21220 Gevrey Chambertin - FRANCE