



AURORE D52
Wall-mounted version

















## **AURORE D52**

## Wall-mounted version

Range	Highly flexible recessed ceiling downlight for general & accent lighting
Description	Low luminance Rotation 360° - Adjustable tilt 90° White finish RAL 9003 (other upon request)
Net weight	0.80 kg
Installation	No specific tools required
LED characteristics	2700K - 3000K - 4000K - 5000K MacAdam ellipse: 3 SDCM (standard version) - 2 SDCM (premium version) CRI: 90 (standard version) - CRI: 95, R9 > 90 (premium version) UGR < 15 LED ENGINE 600 to 2 000 lm according to version
Optical beam	7°- 12° - 15° - 25° - 30° - 40° - Elliptic - Special filter upon request
Connection	Connectors in the box
Integrated power supply	350mA to 700mA constant current driver integrated in the box
Separate power supply	350mA to 1400mA constant current driver according to version Dimmable driver upon request
LED power	6W to 25W
Use limitations	The product must be installed into a ventilated area.  Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees.  The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty.  The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product.  All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



Last update : 03.03.2022


Firalux & LOuss brands


SARL, Capital 40 000€ RCS DIJON B 503 367 245 TVA/VAT n°: FR24 503 367 245 APE 4676Z Tel.: +33 380 48 65 68 contact@louss.fr www.louss.fr Best group Siège social / Head Office PA Les Terres d'Or Route de Saint Philibert 21220 Gevrey Chambertin - FRANCE









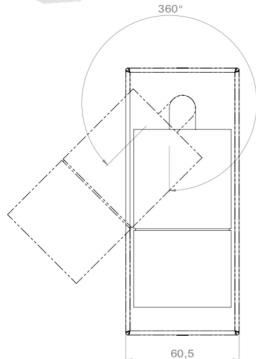

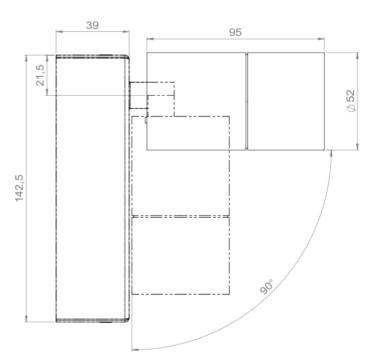

AURORE D52 Rectangular Wall-mounted – Lenght 95mm  $\leq$  13W

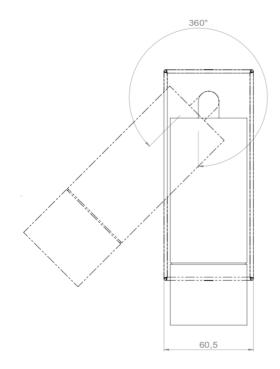



AURORE D52 Rectangular Wall-mounted – Lenght 140mm  $\leq$  13W

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

**W**uss

Last update: 03.03.2022

Firalux & LOuss brands


SARL, Capital 40 000€ RCS DIJON B 503 367 245 TVA/VAT n°: FR24 503 367 245 APE 4676Z

Tel.: +33 380 48 65 68 contact@louss.fr www.louss.fr Best group Siège social / Head Office PA Les Terres d'Or Route de Saint Philibert 21220 Gevrey Chambertin - FRANCE







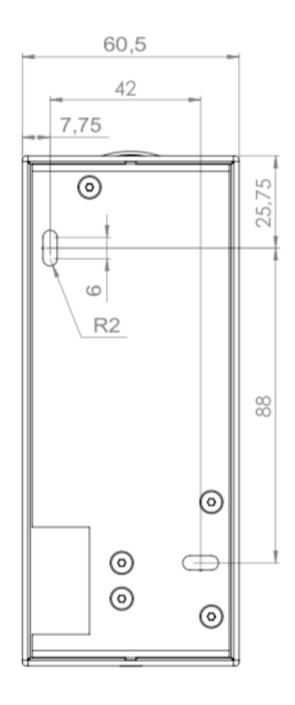

## AURORE D52 Rectangular Wall-mounted - Wall-mounted fixing

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.



Last update: 03.03.2022

Firalux & LOuss brands