


# LOUSS



Lighting Emotion



## MAGMATO 80

The recessed architectural  
floodlight Medium



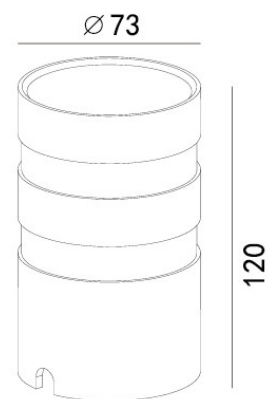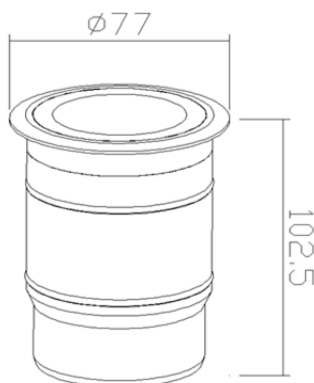

## MAGMATO 80

<b>Range</b>	Recessed architectural floodlighting
<b>Description</b>	Body in aluminium, head in stainless steel Armoured glass Dedicated recessed box
<b>Dimensions</b>	<b>Luminaire:</b> External diameter: 77 mm - Length : 103 mm <b>Recessed box:</b> Diameter: 73mm - Length: 120mm
<b>LED characteristics</b>	1 LED: 2700K – 3000K – 3500K – 4000K – 5000K (other upon request) CRI 80 – 90 - 95
<b>Optical beam</b>	4° - 6° - 15° - 30° - 40° - 25x50° elliptical – Wall Washer (other upon request)
<b>Connection</b>	Delivered with 1m standard cable(more length upon request)
<b>Integrated driver</b>	24V
<b>LED power</b>	7W
<b>Use limitations</b>	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
<b>Warranty</b>	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

LOuss

Last update : 04/02/2019

Firalux & LOuss brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE