



MINI FILED

The discreet spotlight

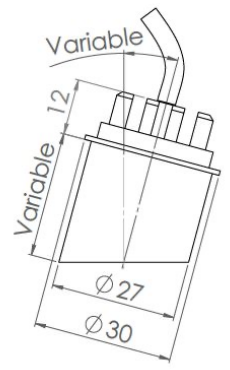

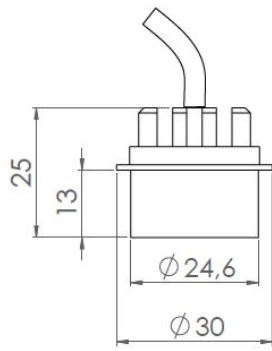

SIMPLE MINIFILED

LOW LUMINANCE MINIFILED

MINIFILED

Range	Recessed spotlight for accent lighting
Description	Matt finish black anodized aluminium Supplied in standard or low luminance straight version or inclined (3°, 5°, 7°, 10°, 15° ou 20°)
Dimensions	Installation diameter : 24.6mm standard version, 27mm low luminance version Lenght : 25mm standard version, 34mm to 39mm with low luminance version
Net Weight	0.025 kg
LED characteristics	1 or 2 LED : 2700K-3000K-3500K-4000K- (mix colours upon request) MacAdam ellipse: 3 SDCM CRI: 90 Luminous flux : 80 lm (1 LED) – 160 lm (2 LED)
Optical beam	8° - 14° - 21° - 26° - 30° - 40°
Connection	Optional : Easy plug system (20cm cable + male & female quick connectors)
Separate power supply	350mA – 700mA max constant current driver
LED power	1W (1 LED) – 2W (2 LED)
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

2/5

LOuss

Last update : 12.07.2024 - R

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z







Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE



LOW LUMINANCE MINIFILED

Installation from above

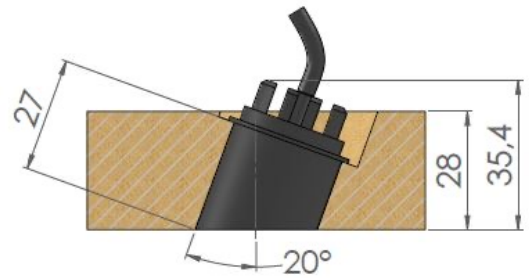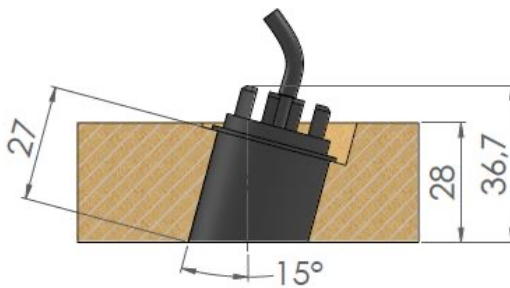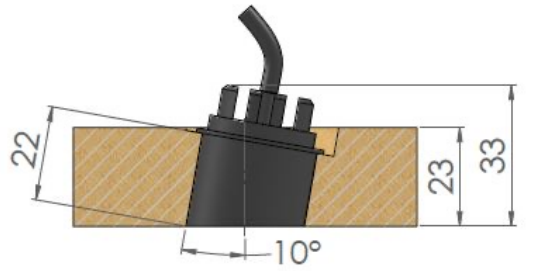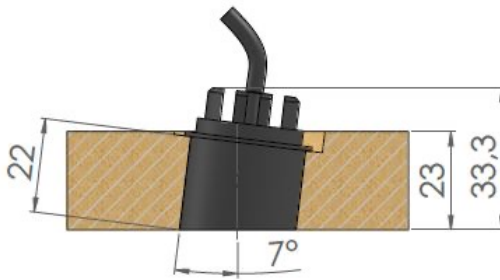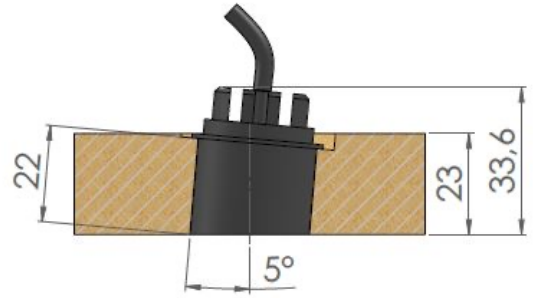
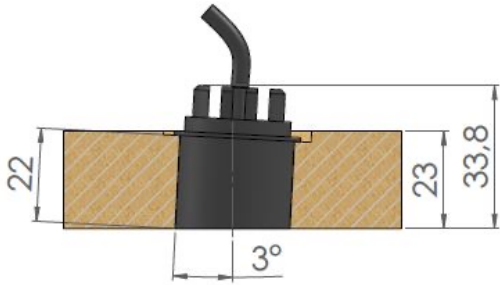




LOW LUMINANCE MINIFILED

Magnetic version

Installation from below with plate

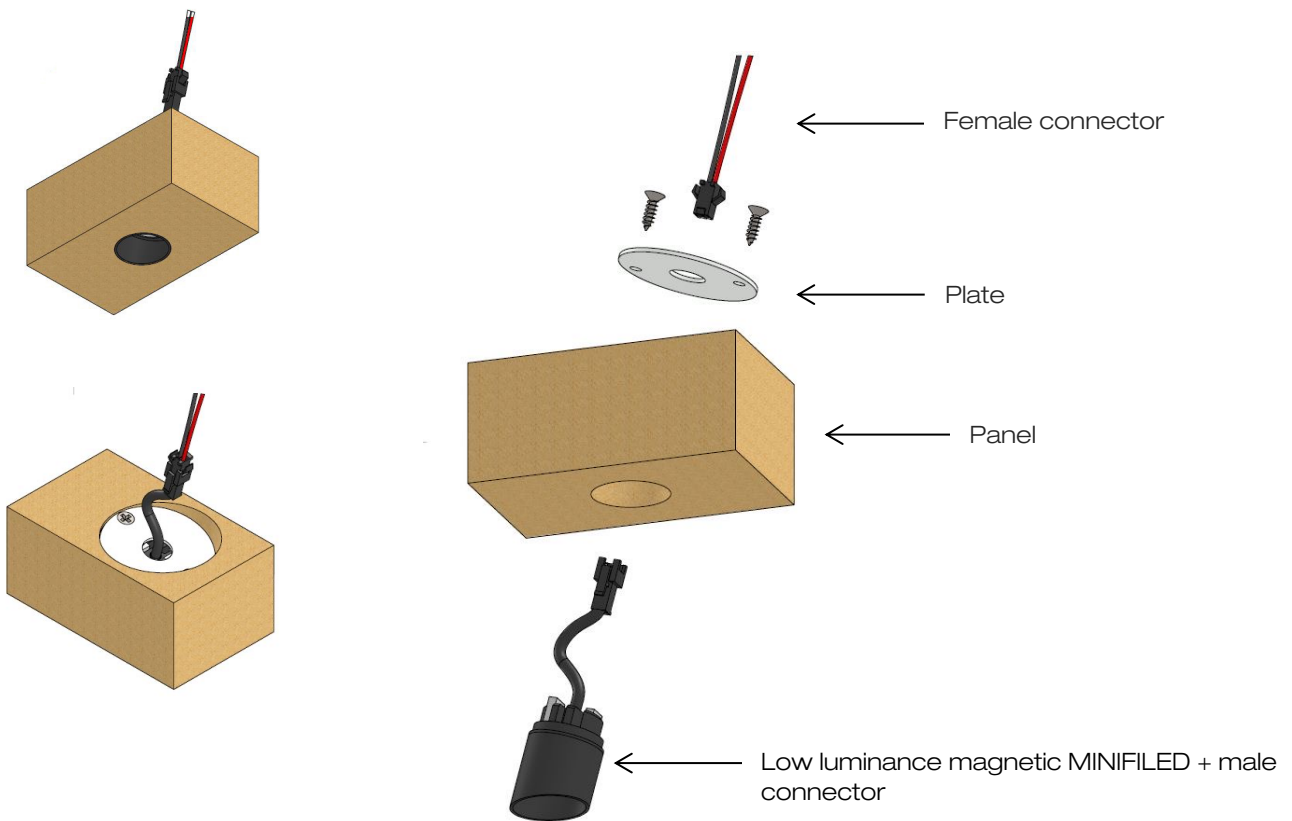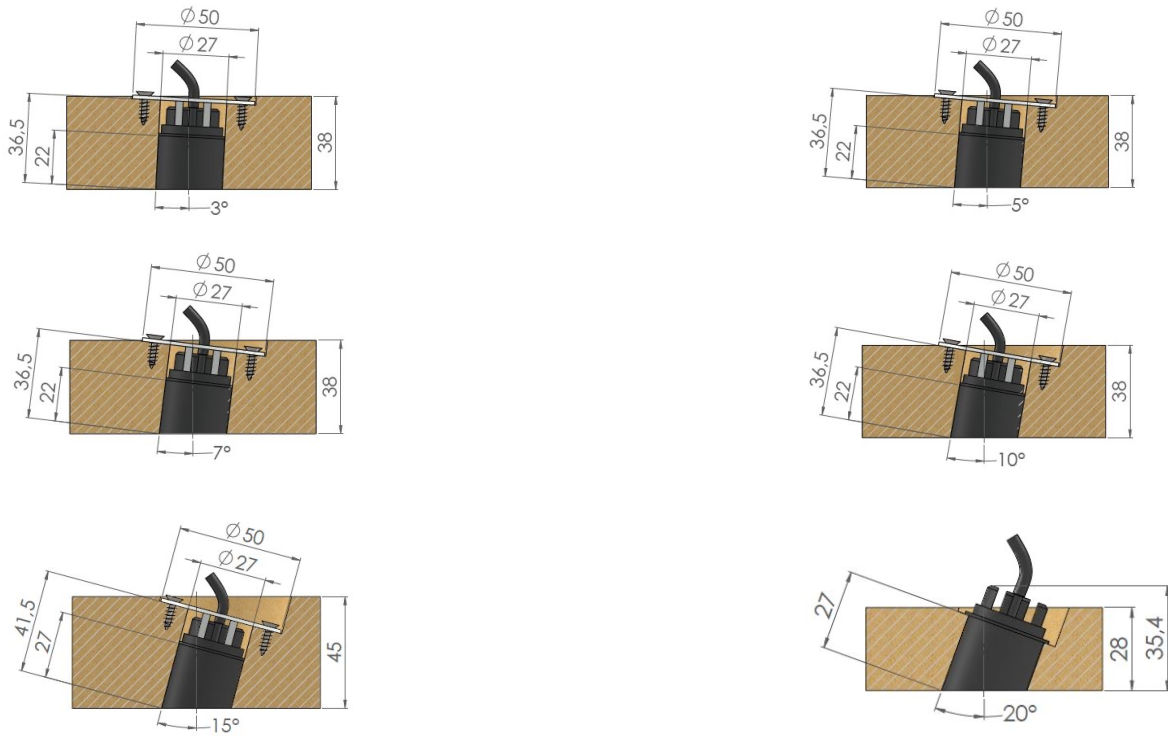



LOW LUMINANCE MINIFILED

Magnetic version

Installation from below with recessed box

