



AURORE D22 TRIMELSS




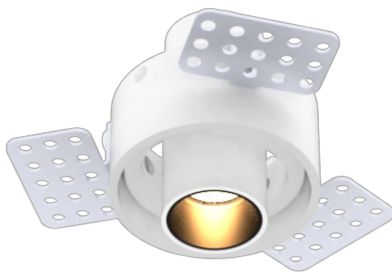

Trimless

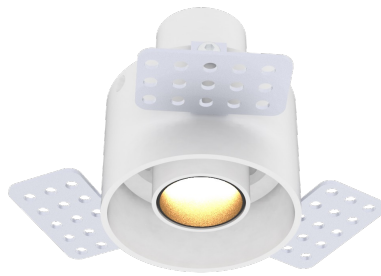

Trimless Flush

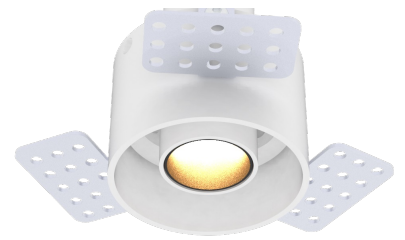

Trimless Short


AURORE D22 TRIMLESS

Range	Adjustable recessed ceiling downlight for general & accent lighting
Description	Low luminance Rotation 360° Trimless & Trimless Short : Adjustable tilt 30° Trimless Flush : Adjustable tilt 20° White finish RAL 9003 (other upon request)
Installation	Installation diameter : 45mm No specific tools required
Net weight	0.06kg
LED characteristics	2000K - 2200K - 2700K - 3000K - 3500K - 4000K - 4500K Ellipse MacAdam : 3 SDCM CRI90 R9 > 80 UGR < 15
Optical beam	10° - 15° - 20° - 25° - 40° - Elliptical
Connection	Supplied with 0.50m cable
Separate power supply	Remote constant current driver Dimmable driver upon request
LED power	Trimless & Trimless Flush : 3W/900mA max Trimless Short : 2W/700mA max
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.


All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.




AURORE D22 Trimless

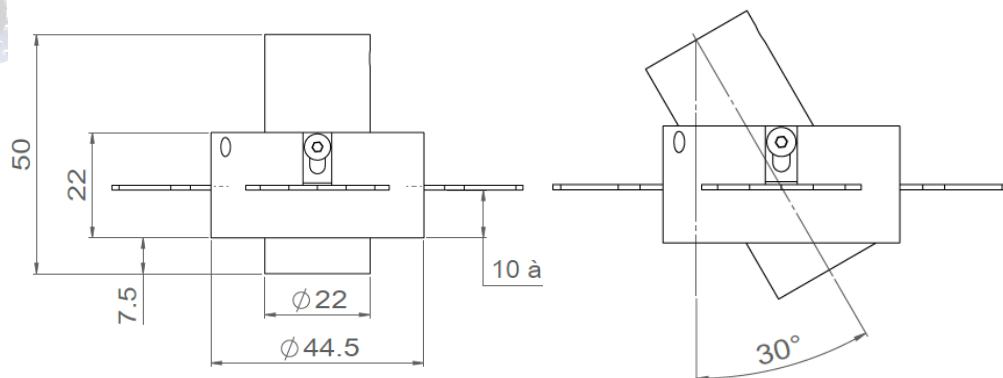

AURORE D22 Trimless Flush

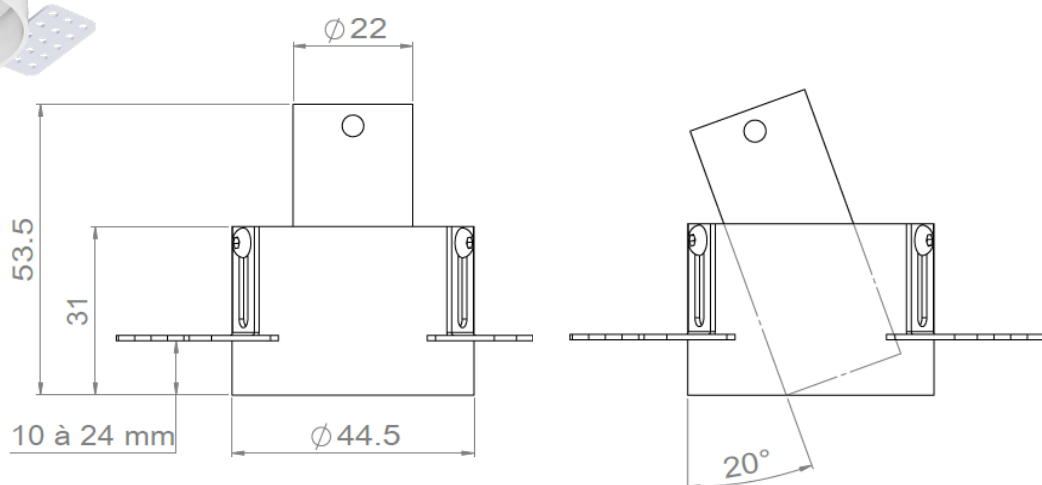

AURORE D22 Trimless Short

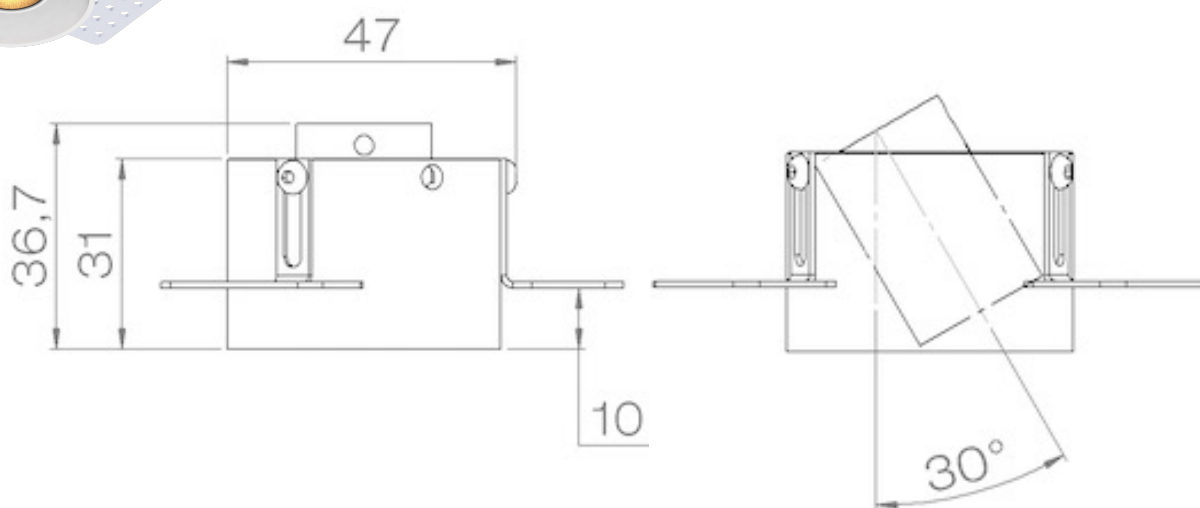

All the connections have to be made before powering up,
otherwise the luminaires could be seriously damaged.

Last update : 2023/04/24

LOUSS

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z


Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

3/4
Firalux & LOUSS brands
Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE




AURORE D22 TRIMLESS


Installation from above

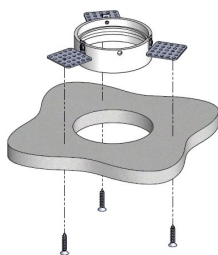


Install the recessed box from above and screw it onto the surface

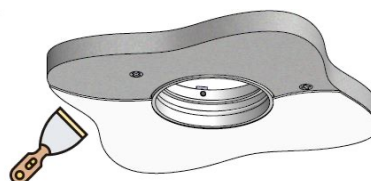


Cover the lateral plates of the recessed box by coating and painting

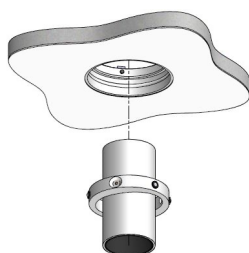


Insert the spotlight from below

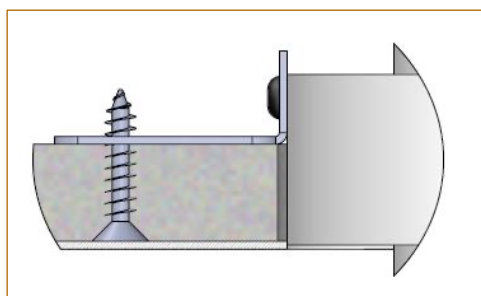


Installation from below

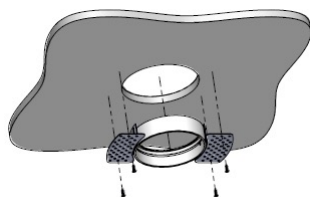

Install the recessed box from below and screw it onto the surface

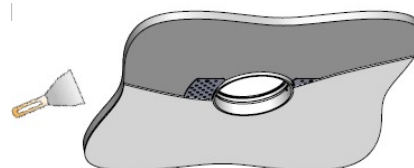

Cover the lateral plates of the recessed box by coating and painting

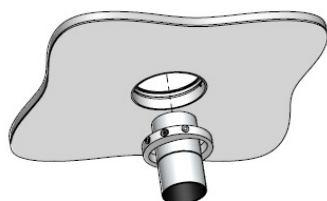

Insert the spotlight from below

