



# LOUSS

Lighting Emotion

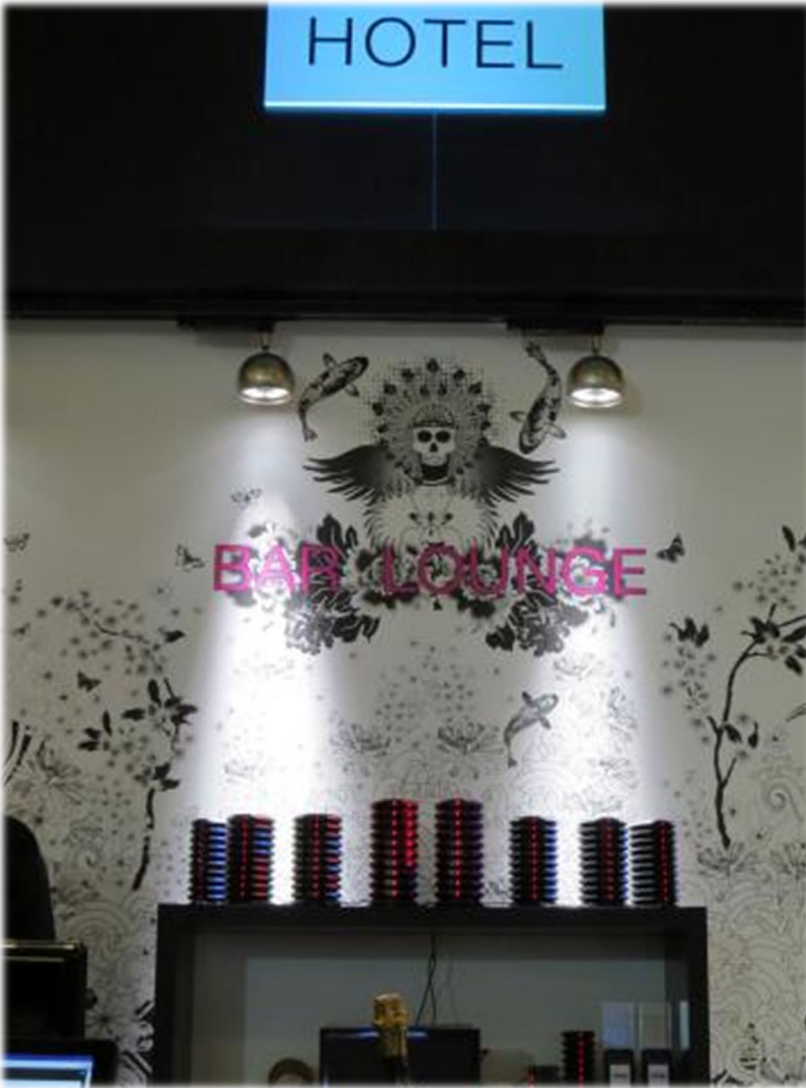



*Designed by  
Benoit LALLOZ*



## ONE

The satellite-like spotlight



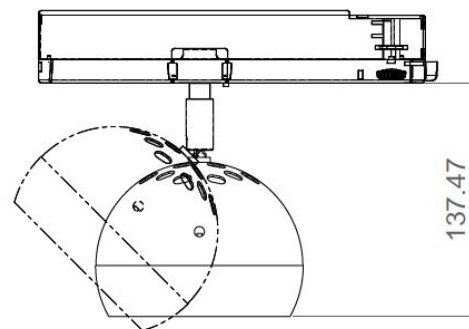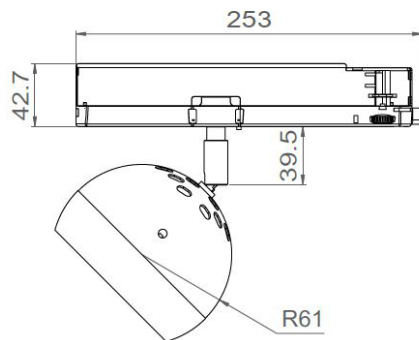

## ONE

<b>Range</b>	Accent or ambient lighting luminaire Designed by Benoit Laloz
<b>Description</b>	Painted steel or satin-brushed metal finish body To be mounted on track
<b>Dimensions</b>	External diameter: 110mm
<b>Weight</b>	0.869kg (without rail)
<b>LED characteristics</b>	6 LED: 3000K – 4000K (other LED colours upon request)
<b>Optical beam</b>	6° - 15° - 35° (other optical beam upon request)
<b>Connection</b>	Universal adapter with 3 switches Integrated constant current driver
<b>Integrated power supply</b>	350mA – 500mA – 700mA
<b>LED Power</b>	350mA : 7.2W 500mA : 10.8W 700mA : 15W
<b>Use limitations</b>	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOUSS, must be approved before use.
<b>Warranty</b>	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,  
otherwise the luminaires could be seriously damaged.

LOUSS

Last update : 20/02/2020

Firalux & LOUSS brands

SARL, Capital 40 000€  
RCS DIJON B 503 367 245  
TVA/VAT n°: FR24 503 367 245  
APE 4676Z

Tel. : +33 380 48 65 68  
contact@louss.fr  
[www.louss.fr](http://www.louss.fr)  
Best group

Siège social / Head Office  
PA Les Terres d'Or  
Route de Saint Philibert  
21220 Gevrey Chambertin - FRANCE