







A range of floodlight for outdoor and indoor





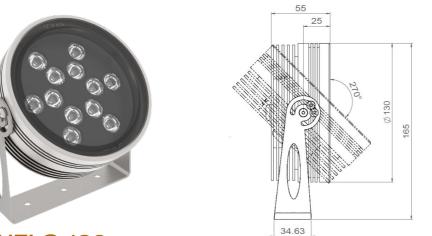



ANELO 130

Range	Surface mounted architectural floodlighting
Description	Body in natural anodised aluminium (other finishing upon request) Extra clear tempered glass Stainless steel bracket
External diameter	130mm
Net Weight	1.3 kg
LED characteristics	6 LED – 12 LED: 2200K – 2700K - 3000K – 4000K – 5000K – 6500K (other LED colours upon request) 6 LED: RGBW 12 LED: Twin White
Optical beam	6° - 15° - 20° - 30° - 40° - 60° (other optical beam upon request) 4in1: 20° - 30° - 55° - 70° reflector
Connection	Delivered with 1m standard cable (more length upon request) Individual connection or connection in series on external constant current driver
Separate power supply	350mA – 500mA – 700mA
LED power	12 LED : 350mA : 14.4W - 500mA : 21.6W - 700mA : 28.8W
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up, otherwise the luminaires could be seriously damaged.

lOuss

SARL, Capital 40 000€ RCS DIJON B 503 367 245 TVA/VAT n°: FR24 503 367 245 APE 4676Z Last update : 04/02/2019

Firalux & LOuss brands

Tel. : +33 380 48 65 68 contact@louss.fr www.louss.fr Best group Siège social / Head Office PA Les Terres d'Or Route de Saint Philibert 21220 Gevrey Chambertin - FRANCE