


LOUSS

Lighting Emotion



LINGO

The svelte and elegant luminaire



IP
20



Ta
25°

850°C



CE

MADE IN
FRANCE

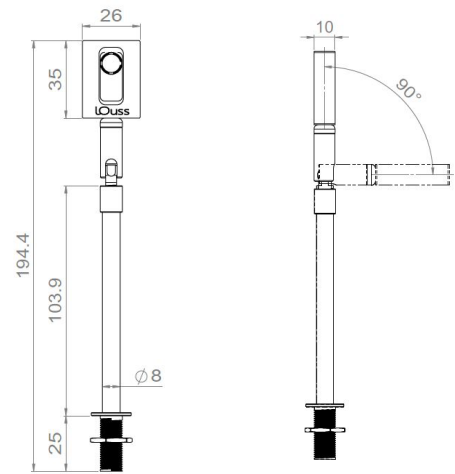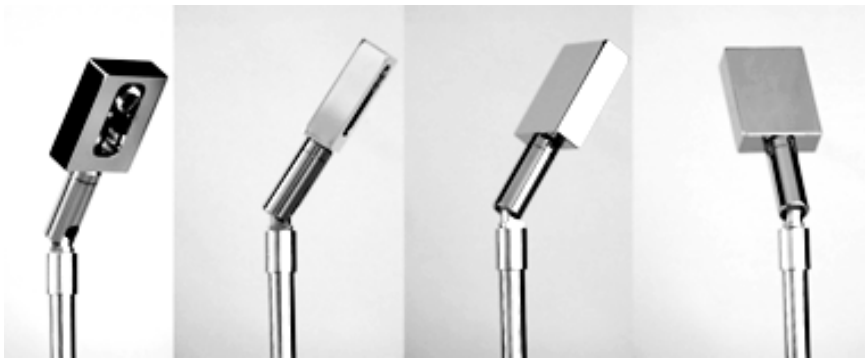

LINGO

Range	Accent decorative luminaire
Description	Mirror finish or gold metal finish body
Dimensions	Adjustable head: 35x26mm Rod length: 100mm, 200mm or 333mm. Diameter: 8mm
Net weight	0.125 kg
LED characteristics	1 LED: 3000K – 4000K (other LED colours upon request)
Optical beam	15° - 25° - 40° - 80° (other optical beams upon request)
Connection	Delivered with 0.5m standard cable (other length upon request) Individual connection or connection in series on external constant current driver
Separate power supply	500mA max
LED power	1.2W : 350mA 1.8W : 500mA
Use limitations	The product must be installed into a ventilated area. Any use with an ambient temperature higher than the specified ambient temperature (Ta) would lead to a more rapid mortality of the product and the withdrawal of our guarantees. The drivers, if not delivered by LOuss, must be approved before use.
Warranty	Life span: L80B10 at 50,000 hours (80% remaining flux) at 25°C ambient temperature. 3-year parts and labour warranty. The warranty does not apply to products that have been opened, modified or repaired and does not cover the effects of a wrong connection, careless, abusive handling, overvoltage, lighting injury, as well as the normal wear of the product. All products are electrically tested and received a functional burn-in.

All the connections have to be made before powering up,
otherwise the luminaire could be seriously damaged.

LOuss

Last update : 20/09/2018

Firalux & LOuss brands

SARL, Capital 40 000€
RCS DIJON B 503 367 245
TVA/VAT n°: FR24 503 367 245
APE 4676Z

Tel. : +33 380 48 65 68
contact@louss.fr
www.louss.fr
Best group

Siège social / Head Office
PA Les Terres d'Or
Route de Saint Philibert
21220 Gevrey Chambertin - FRANCE